

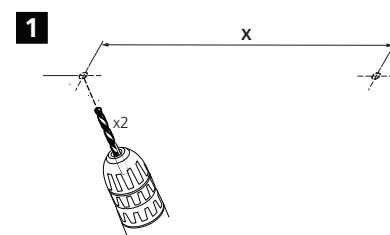
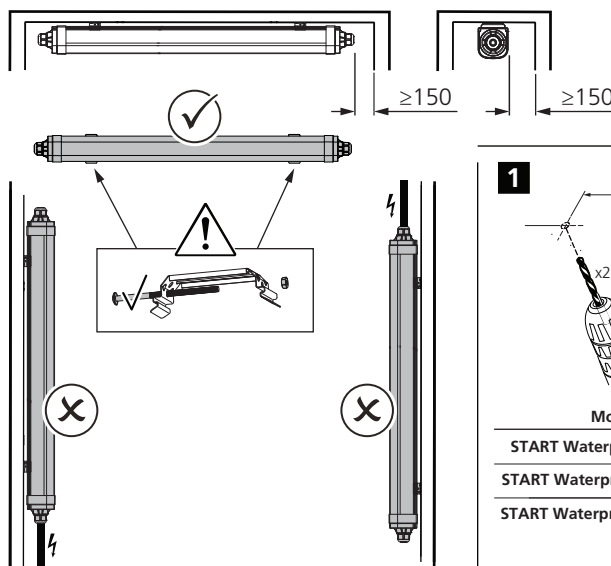
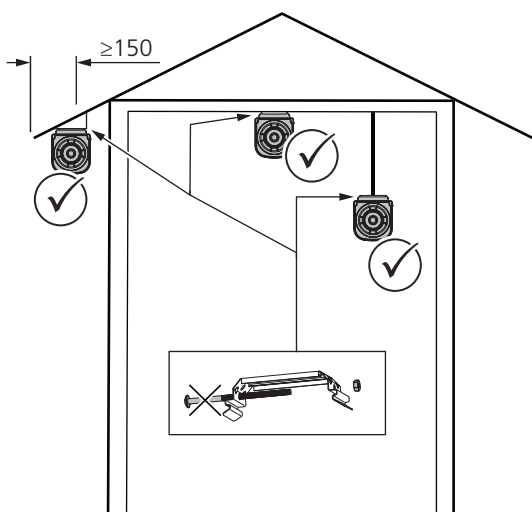
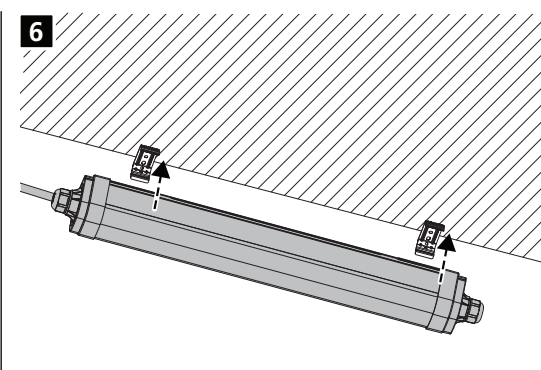
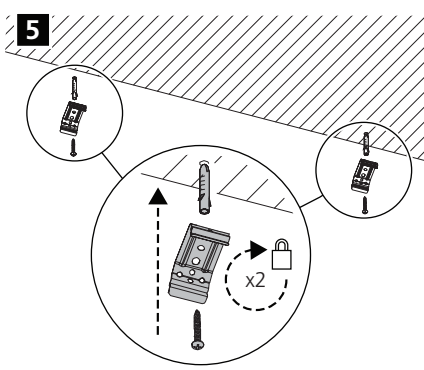
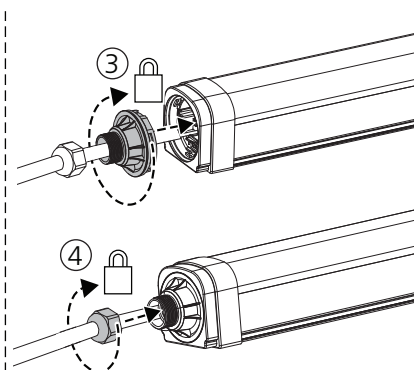
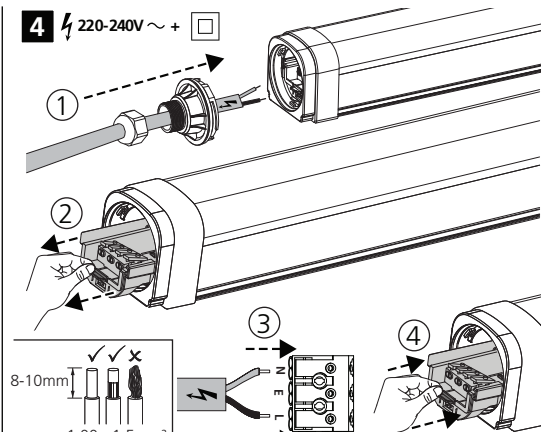


	L
START Waterproof Slim 600	640
START Waterproof Slim 1200	1240
START Waterproof Slim 1500	1540


START Waterproof Slim Suspension Kit
0046035

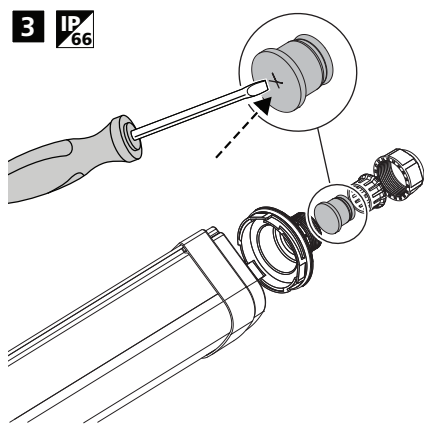



Model	X
START Waterproof Slim 600	400±50mm
START Waterproof Slim 1200	850±50mm
START Waterproof Slim 1500	1150±50mm

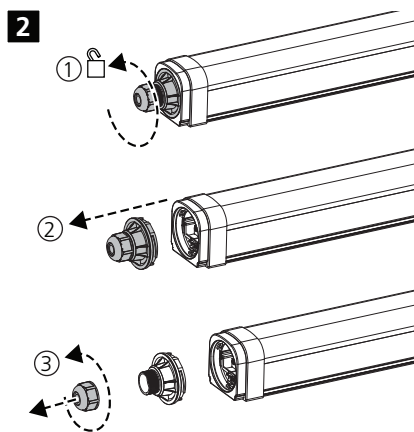

7

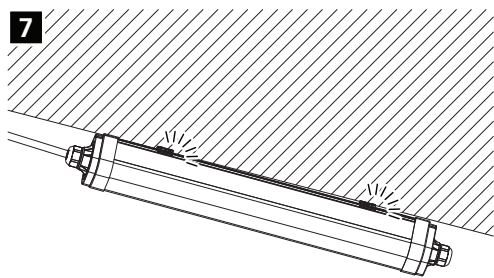








8a 220-240V~ +



	Im	W	Im/W
START Waterproof Slim 600	●	1400	10.5
	○	2550	18.5
START Waterproof Slim 1200	●	2300	17
	○	4650	34.5
START Waterproof Slim 1500	●	3800	26
	○	7300	52.5



8b START Batten ON/OFF MW Sensor KIT

0048986

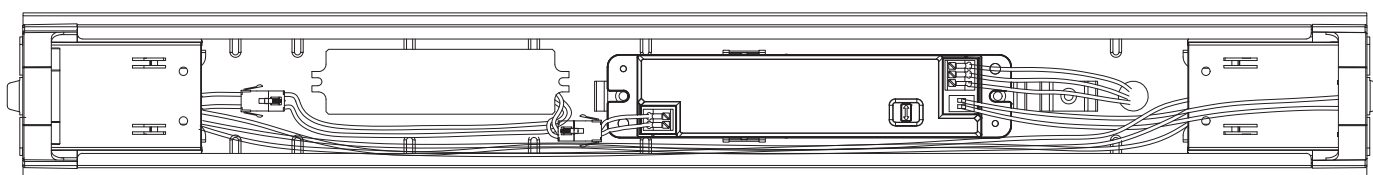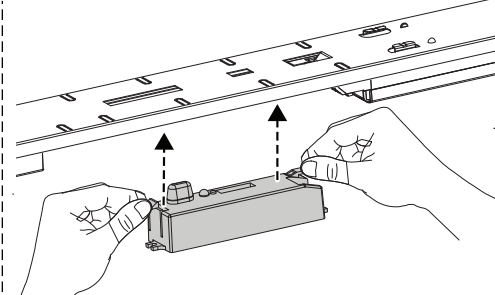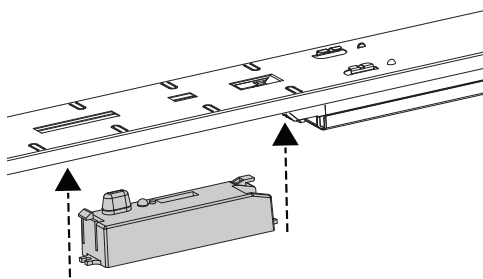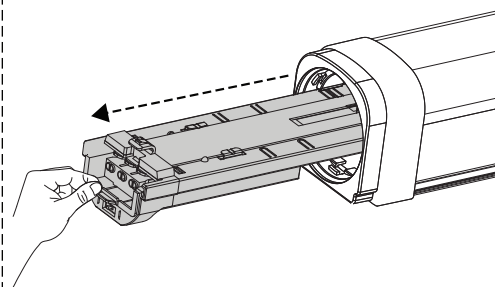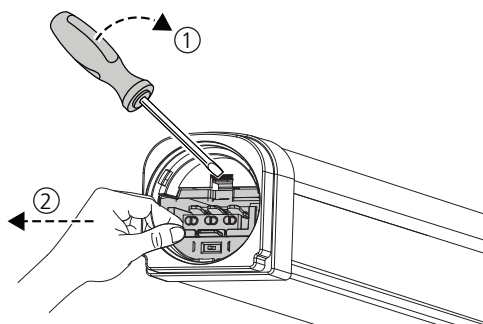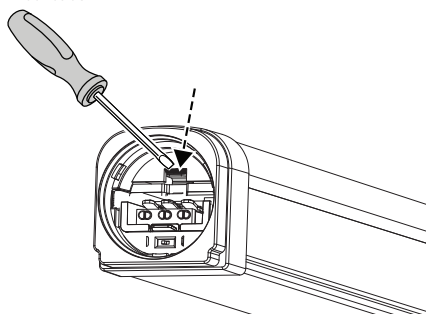

Start Batten ON/OFF MW Sensor KIT

0048986

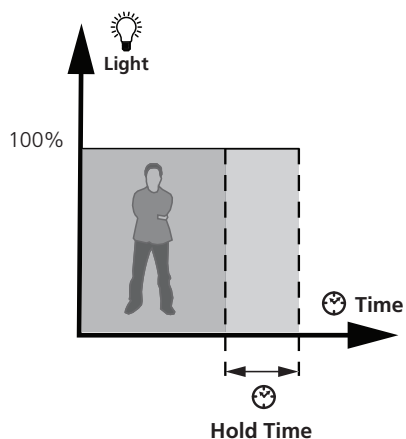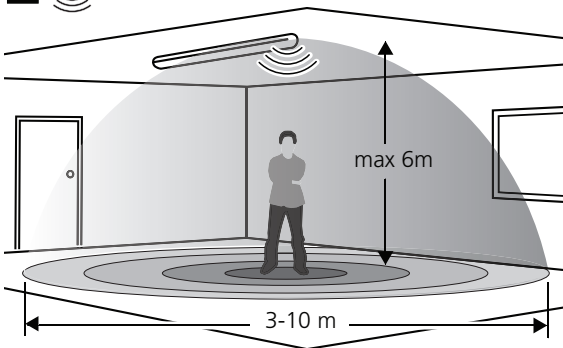

ON



OFF

Detection Area


	1	2	%	Detection Ø
I	●	●	100%	10m
II	○	●	75%	8m
III	●	○	50%	5m
IV	○	○	25%	3m

Hold Time



	3	4	5	⌚
I	●	●	●	5s
II	○	●	●	30s
III	●	○	●	90s
IV	○	○	●	5min
V	●	○	○	20min
VI	○	○	○	30min

Daylight Sensor

	6	7	8	Lux
I	●	●	●	2Lux
II	●	●	○	10Lux
III	○	●	○	30Lux
IV	●	○	○	50Lux
V	○	○	○	Disable

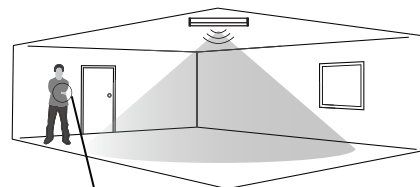


OFF

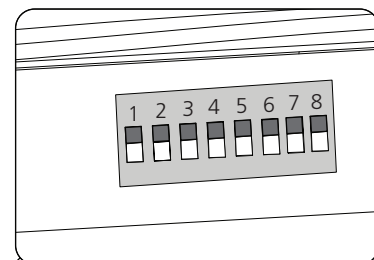

9

3 x 1.0-2.5 mm²

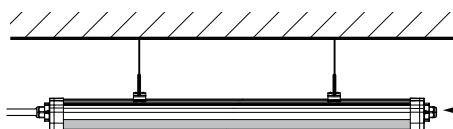

IP66




3



(Max. 20 pcs)

3 x 1.5-2.5 mm²

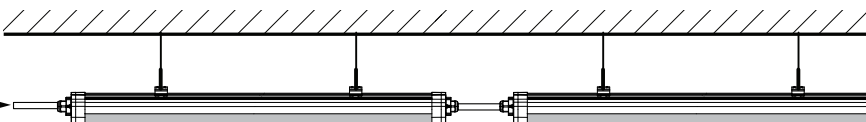

IP66



3