


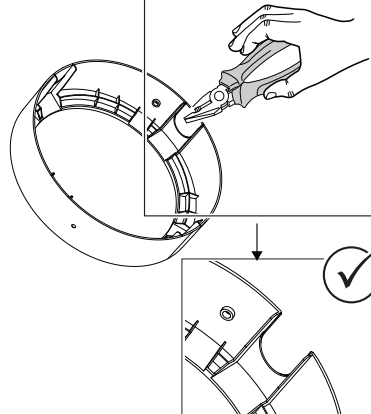
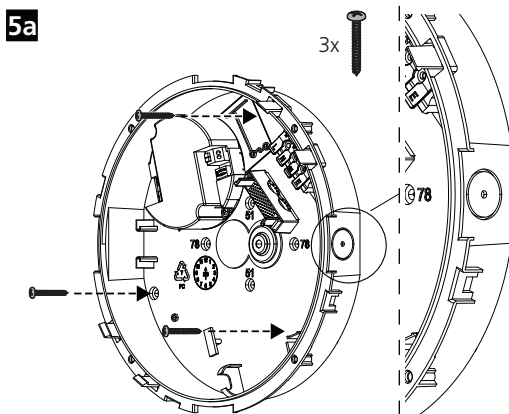
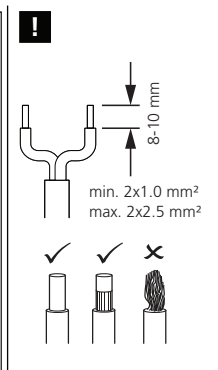
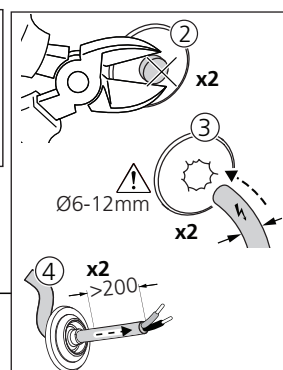
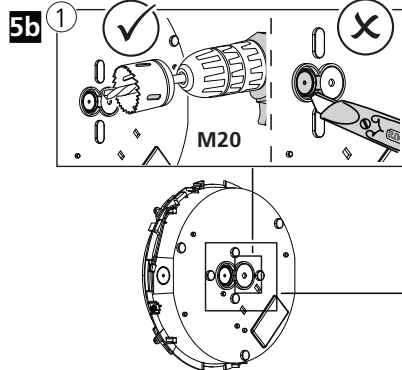
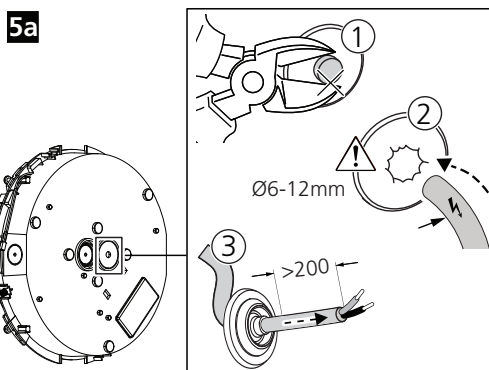
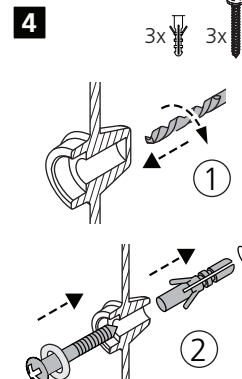
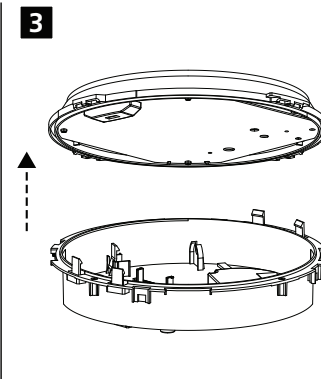
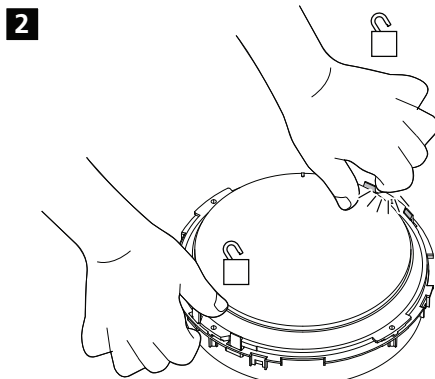
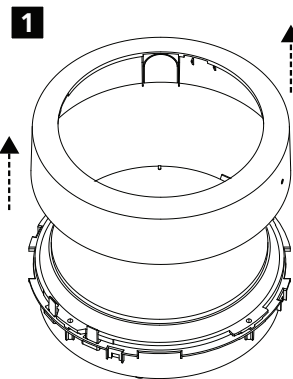
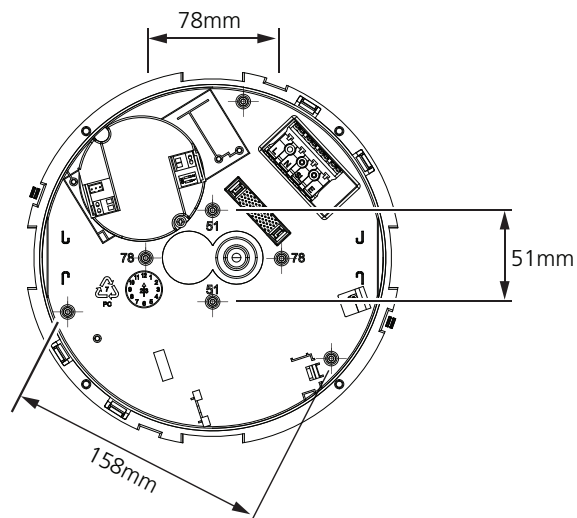








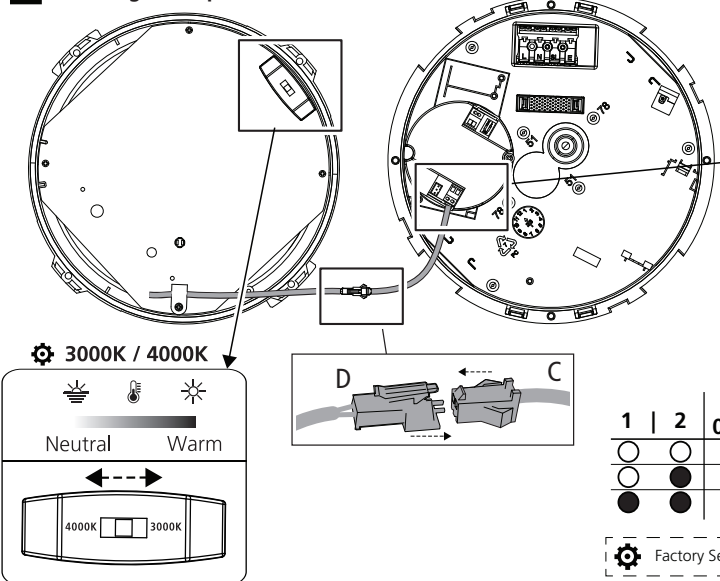

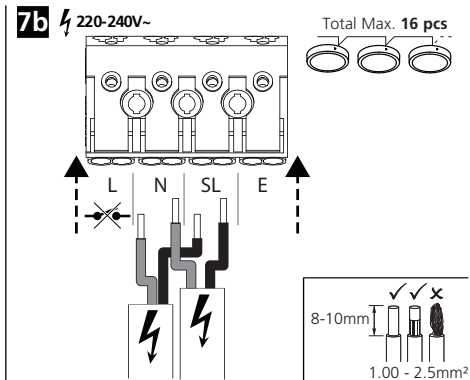




ON

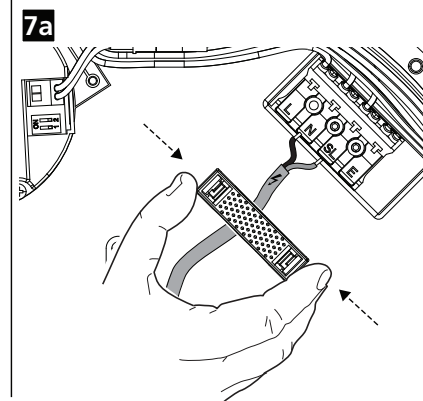



1 2





		0040050, 0040052		0040150, 0040152 0040088		
P[W]						
0040050,0040150/ 0040052,0040152/0040088		mA	3000K [lm]	4000K [lm]	3000K [lm]	4000K [lm]
1	2					
○	○	125	720	780	740	800
○	●	170	960	1025	980	1050
●	●	260	1425	1525 ⚙	1450	1550 ⚙

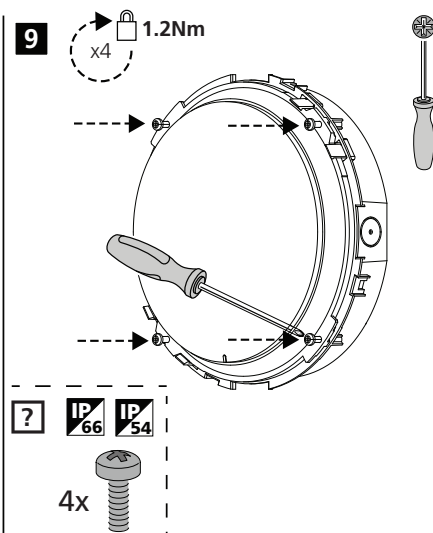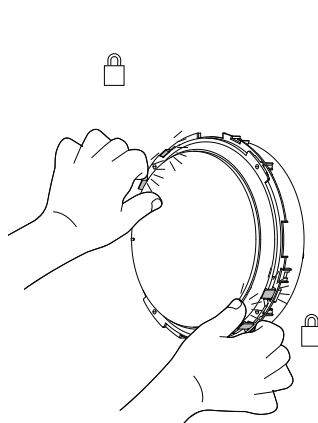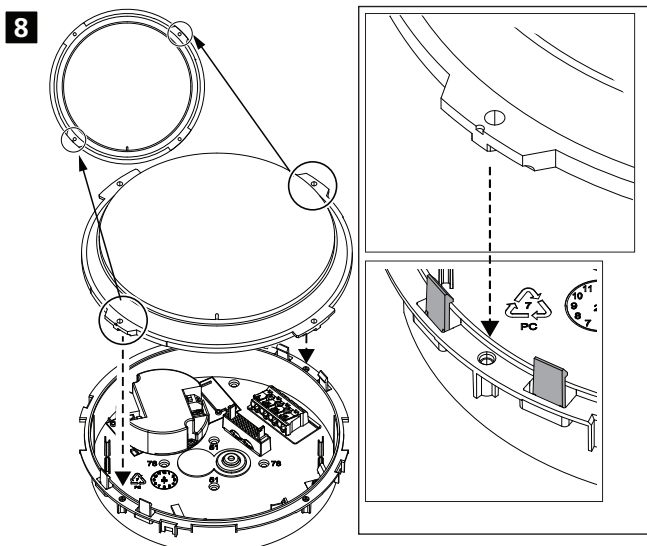


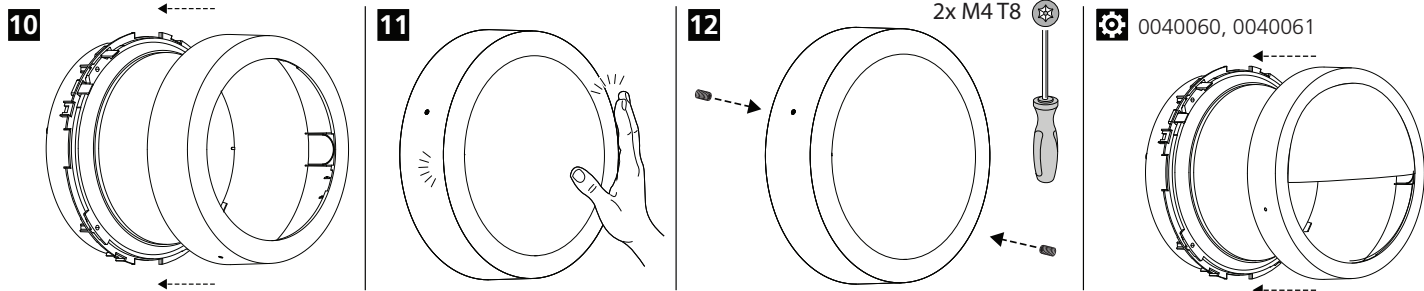


Novella IP66 MW Corridor KIT
0040064








1

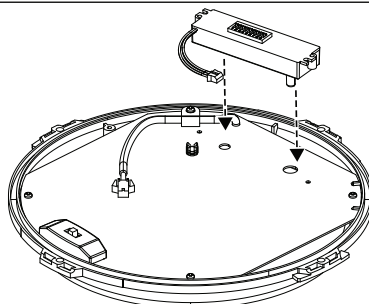

2

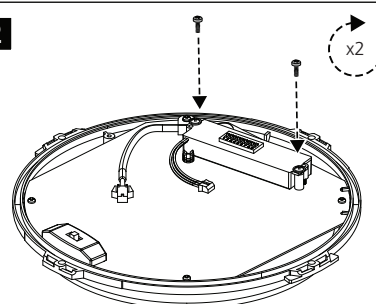

3

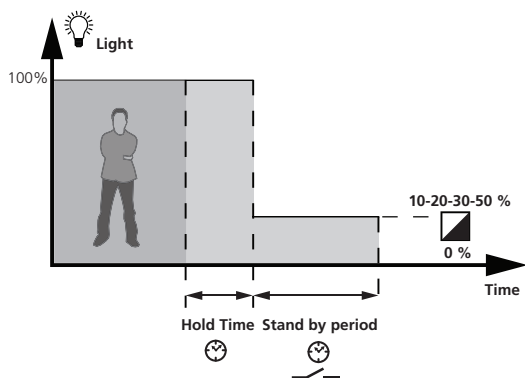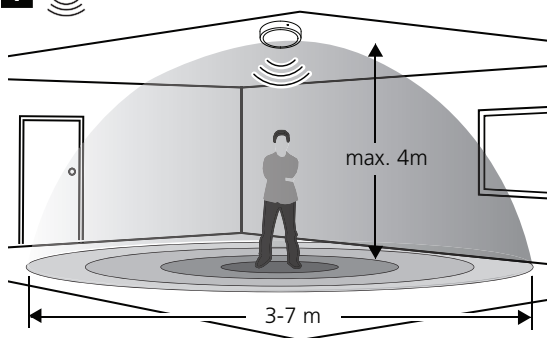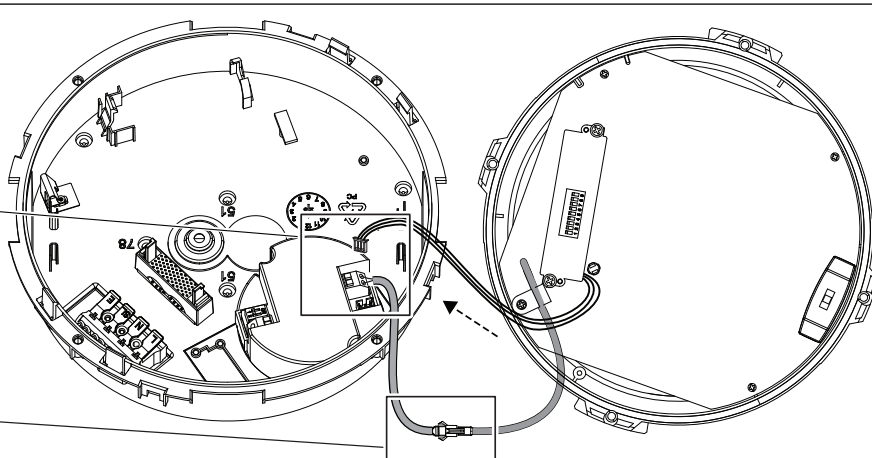

Detection Area

1	
I	100%
II	50%

Hold-Time

2	3	
I	5s	
II	30s	
III	1min	
IV	10min	

Daylight Threshold





4	5	LUX ON	LUX OFF
I	Disable	Disable	
II	50lux	100lux	
III	10lux	100lux	
IV	2lux	100lux	

Stand-by period


6	7	
I	0s	
II	30s	
III	20min	
IV	+ ∞	

Stand-by dimming level



8	9	
I	10%	
II	20%	
III	30%	
IV	50%	

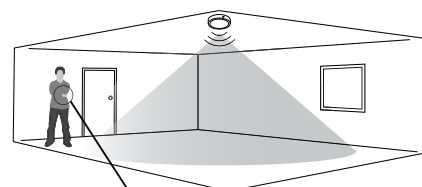


Novella IP66 EM3 KIT for Small
0040065

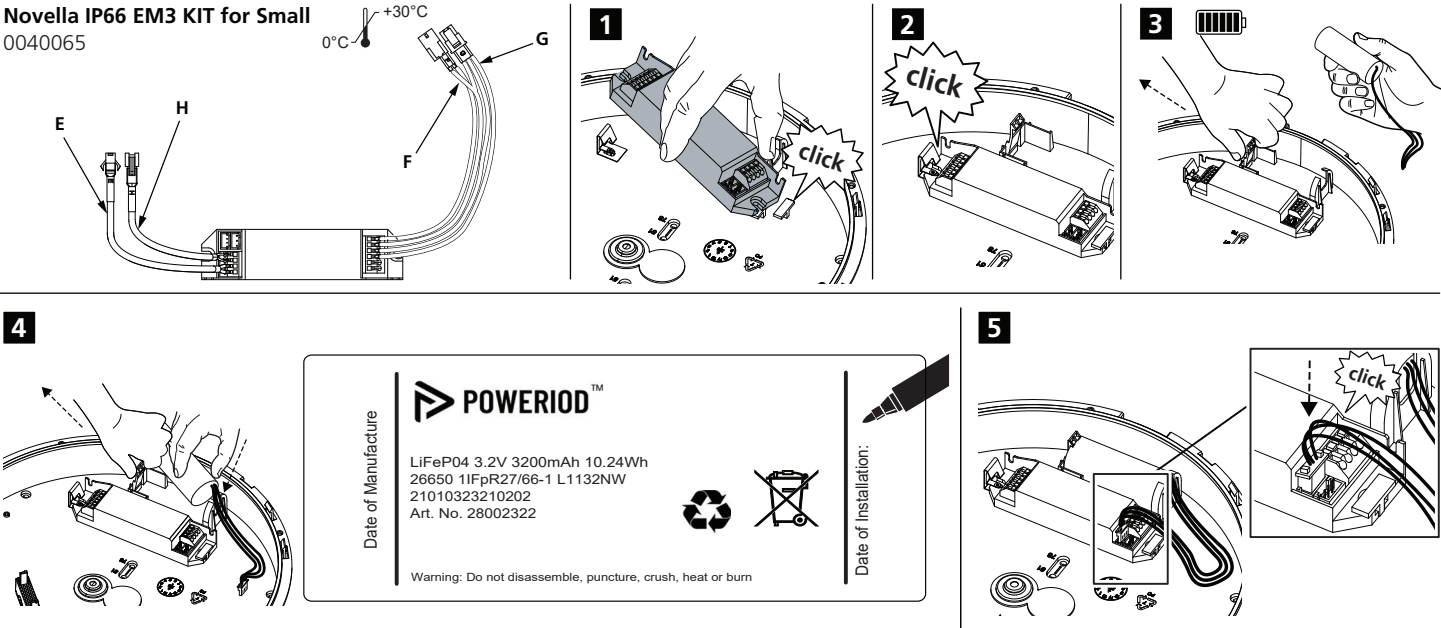


LED INDICATION		STATUS		COMMENT
LED Colour	Status	Flashing		
		ON	OFF	
Green	●	∞	-	Power and System OK
	●	4.0 sec	1.0 sec	Battery Connected and Charging
	●	2.0 sec	2.0 sec	Duration Test in Progress
	●	0.5 sec	0.5 sec	Function Test in Progress
Red	●	4.0 sec	1.0 sec	Battery Temperature Issue
	●	0.5 sec	0.5 sec	Battery Fault
	●●	0.5 sec	0.5 sec	Low Battery
	●●●	0.5 sec	0.5 sec	Charging Fault
	●●●●	0.5 sec	0.5 sec	Driver Fault
	●●●●●	0.5 sec	0.5 sec	Load Fault
Red&Green	●	-	∞	Power off

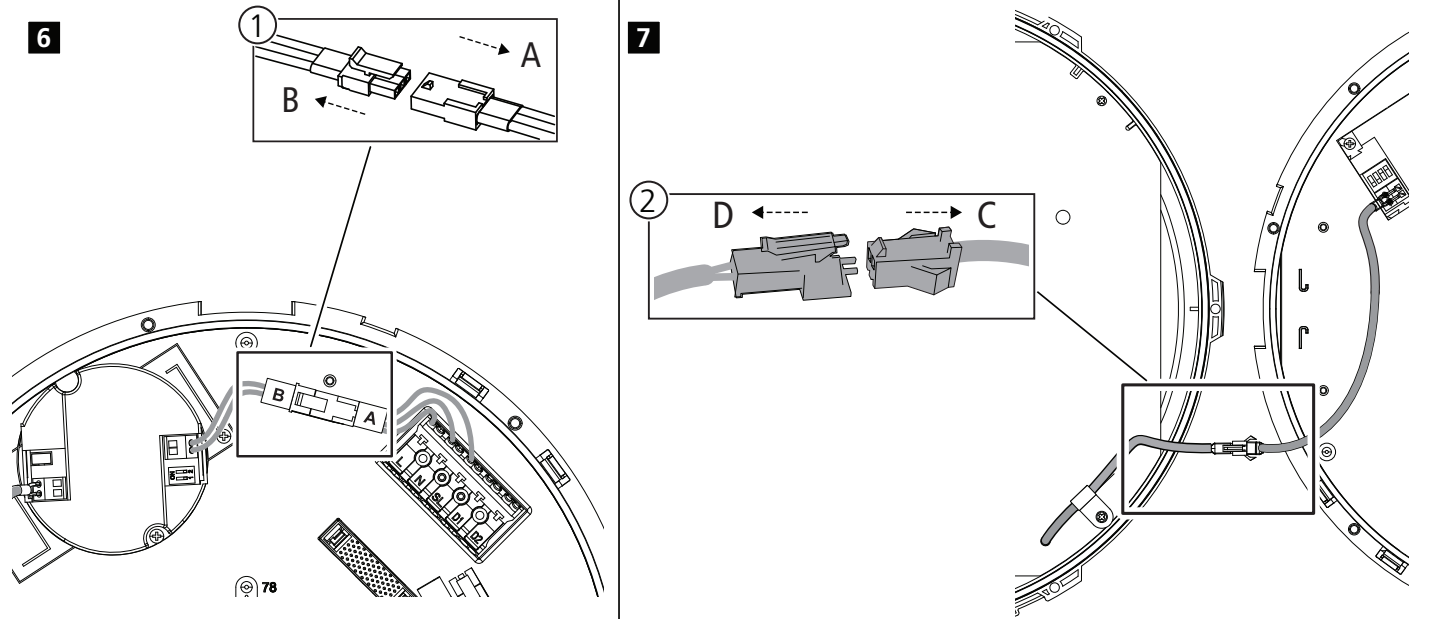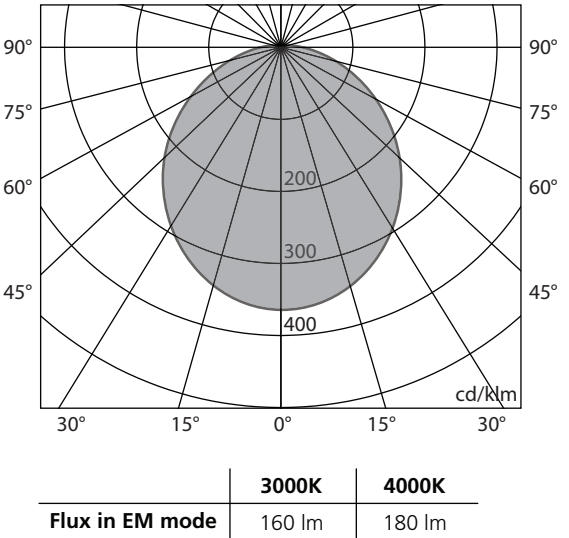

8

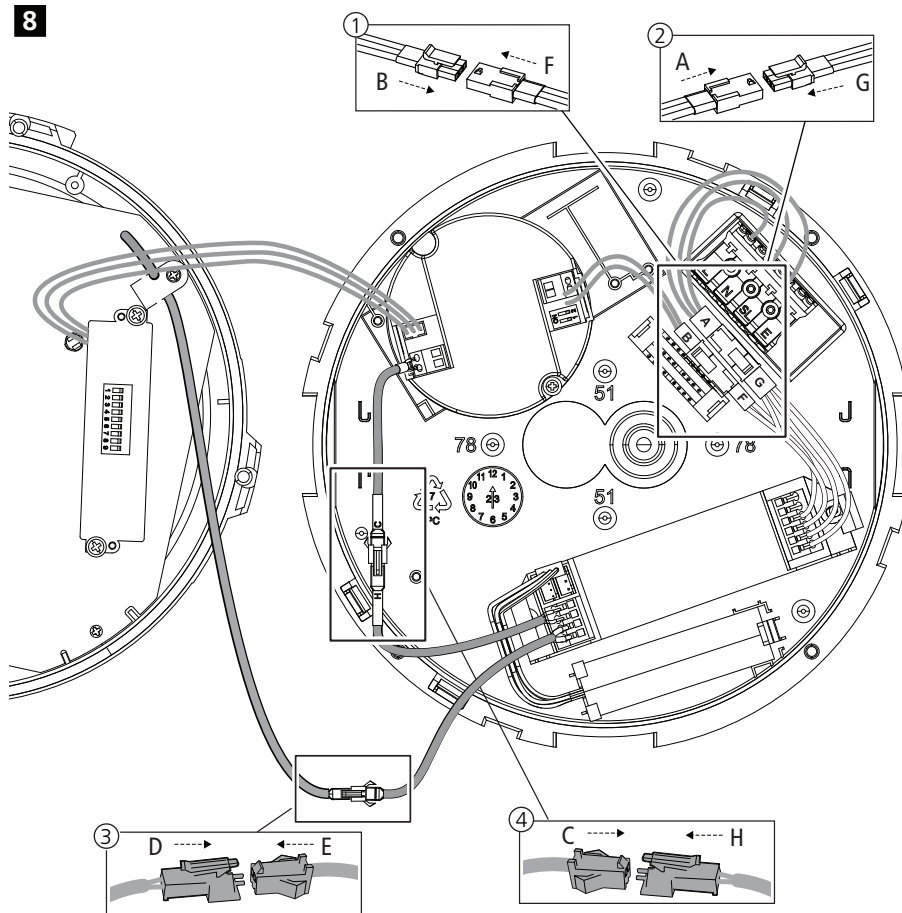


9

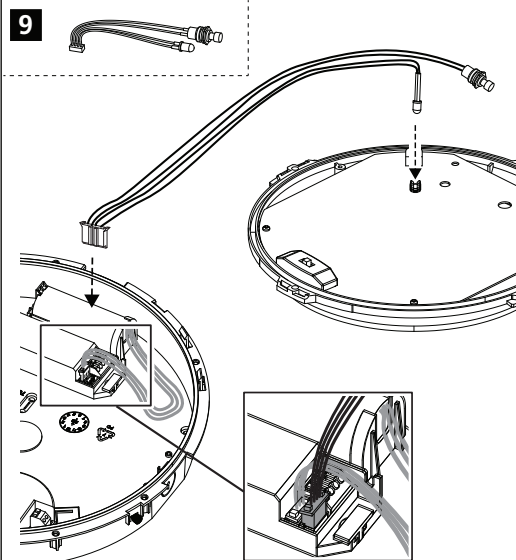


10a

220-240V~ +




10b


220-240V~ +




1

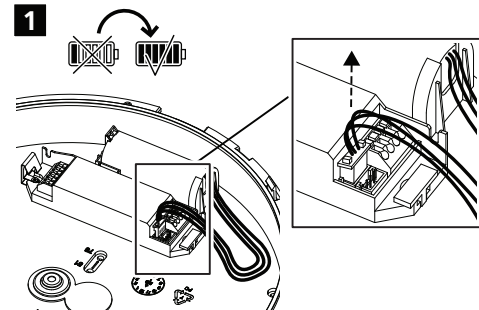


2

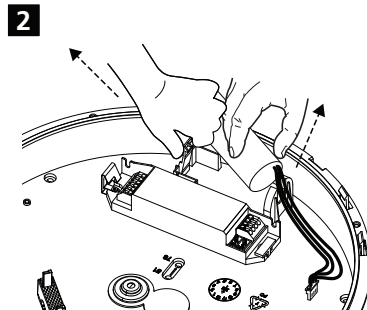


3

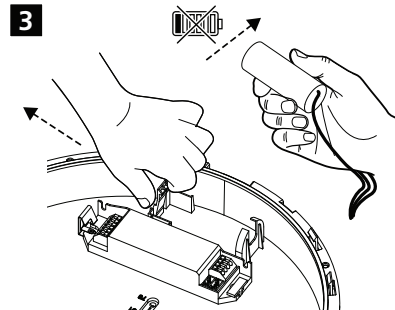


4



5



6

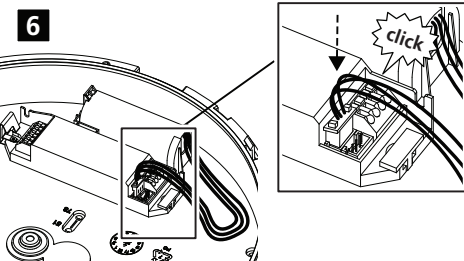

Date of Manufacture

POWERIOD™

LiFeP04 3.2V 3200mAh 10.24Wh
26650 11FpR27/66-1 L1132NW
21010323210202
Art. No. 28002322

Warning: Do not disassemble, puncture, crush, heat or burn

Date of Installation: